


INSTRUCTION SHEET FOR LED EMERGENCY LIGHTING

Technical Drawing

LED SMD LED 50.40 3.7V 2,000mAh Battery **Battery Life** >3 Hours Charging Time 15-24 Hours 255. 50 90.00 Power (W) Main Voltage Frequency Model No Lamp Type **Battery Life** EL-LED22A 4W SMD LED 50/60Hz 220-240VAC >3Hours

LED Emergency Light — ELECTRICAL CONNECTION

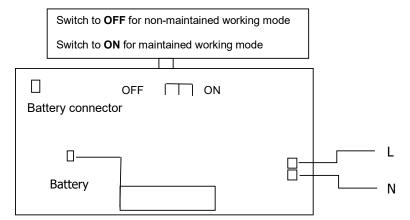

Safety Warnings!

- All servicing should be performed by a qualified personnel only.
- Do not let power cords touch hot surface.
- Do not use outdoors.
- Do not mount in hazardous locations, or near gas or electric heaters.
- Do not use this equipment for other than intended use.
- Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.

Landlines.: 8282-5049; 8282-5098 Mobile Nos. 0908-8908597; 0917-3079188

Email: sales mktg@colentco.com / iwata@colentco.com

Website: www.colentco.com

